


# AT-LAST-A-SEAL® SEALING SYSTEM

- ✓ Simple Installation
- ✓ Low Maintenance
- ✓ Corrosion Resistant
- ✓ Fast Delivery
- ✓ Super Heavy Duty
- ✓ Floating Seal



At-Last-A-Seal® becomes part of the containment wall, sealing the inside of the chute and floating with the curve of the belt.

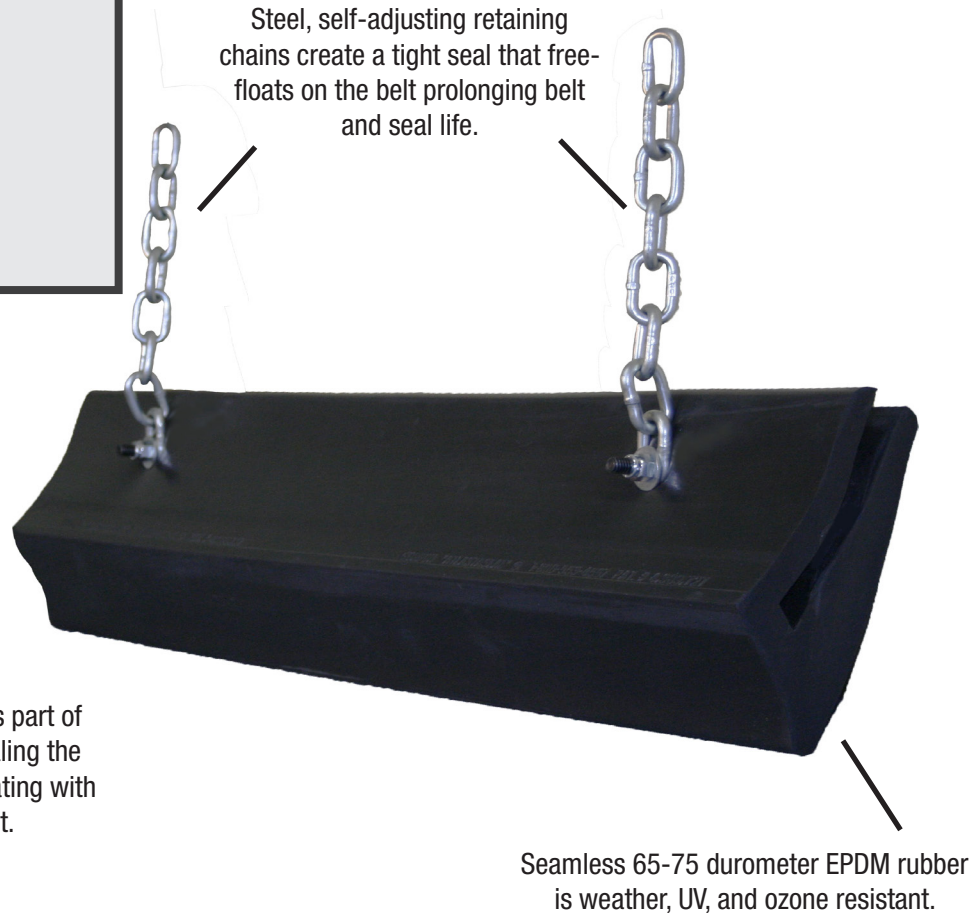

- *At-Last-A-Seal*® provides a 'live' seal and moves freely on the chute wall requiring minimal, if any, maintenance.
- Self-adjusts to the load weight on the belt increasing the life of the seal.
- No seams or joints means no leakage and no maintenance.
- No clamps or mounting brackets needed for installation.
- Protects the chute wall by acting as a chute liner.
- Available in continuous lengths up to 600'.
- Now available for standard or flat belts.
- Ideal with Simplicity Slider System.



## WHO IS ARCH ENVIRONMENTAL?

Manufacturer and worldwide distributor of preferred bulk conveyor components since 1975.



800.553.4567 [www.archenv.com](http://www.archenv.com)

## MECHANICAL DIVISION

Belt Cleaners • Belt Alignment • Sealing Systems  
Dust Control Systems • Impact/Slider Systems

## ELECTRICAL DIVISION

Belt Scales • Metal Detectors • Pull Cord Switches  
Belt Protection Devices • Conveyor Control Systems


# AT-LAST-A-SEAL® SEALING SYSTEM

TEMP. RANGE: -40C to +107C (225F) CONTINUOUS  
 +121C(+250F) SHORT TERM

MATERIAL: BLACK EPDM RUBBER  
 EXCELLENT RESISTANCE TO OZONE, UV, AND WEATHER  
 HARDNESS: 65-75 SHORE A

AVERAGE COEFFICIENT OF FRICTION  
 FOR 'ATLASTASEAL' TO CONVEYOR BELT: .38  
 (16 BELT SAMPLES USED)

APPROXIMATE WEIGHT: 5 pounds per foot  
 MAXIMUM STRUCTURE THICKNESS = 1/2"  
 SUPPLIED IN CONTINUOUS LENGTHS UP TO 600 FEET

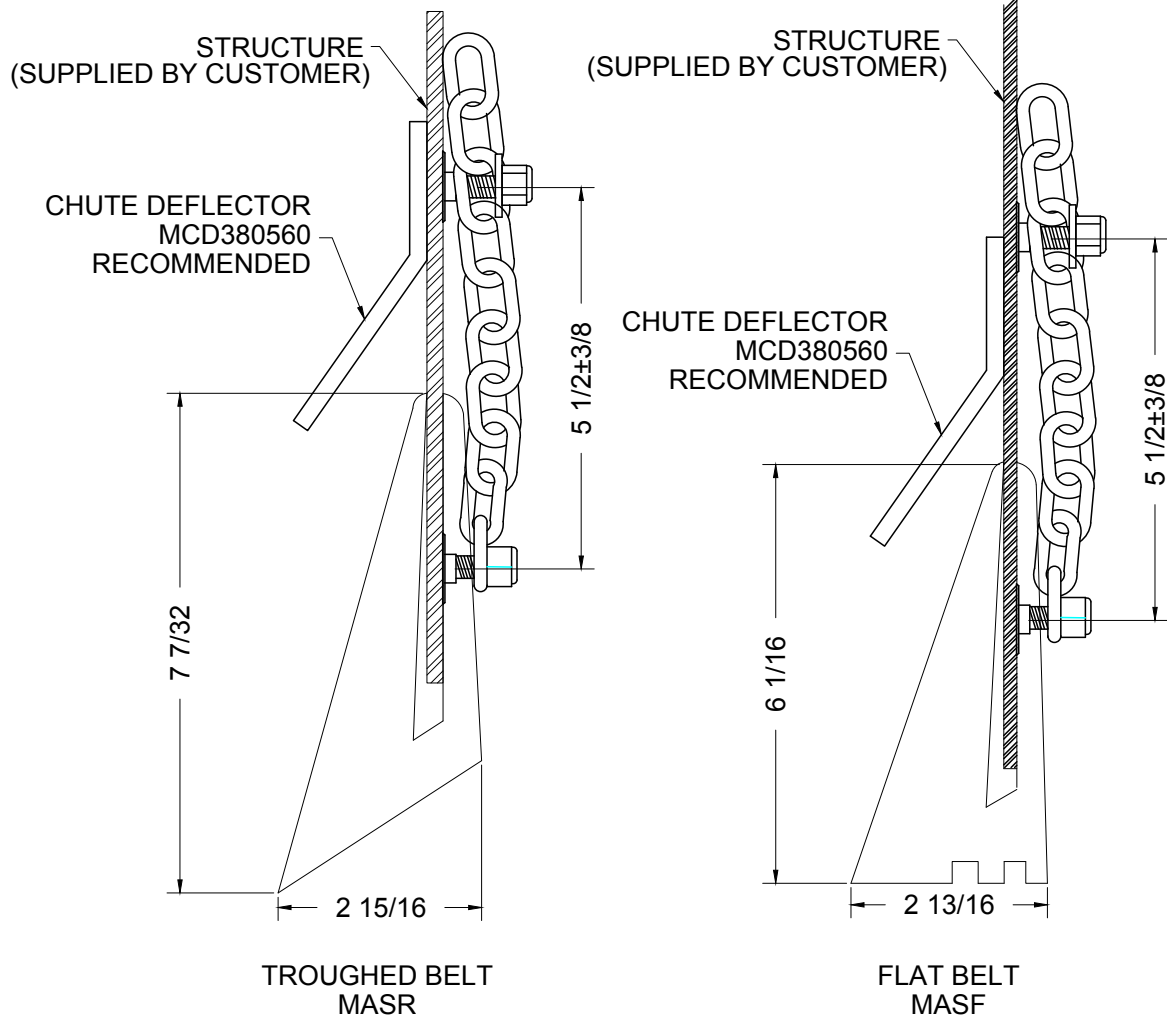

Covered under one or more of the following patents:  
 4,202,437;4,231,471;4,436,446;4,489,823;4,533,036;4,779,716;4,877,125;  
 4,989,727;5,149,305;5,222,588;5,222,589;5,219,063;5,350,053;5,725,083  
 other patents pending



**Note:** If available, prices vary with options.