

FLEXISKIRT® SEALING SYSTEM



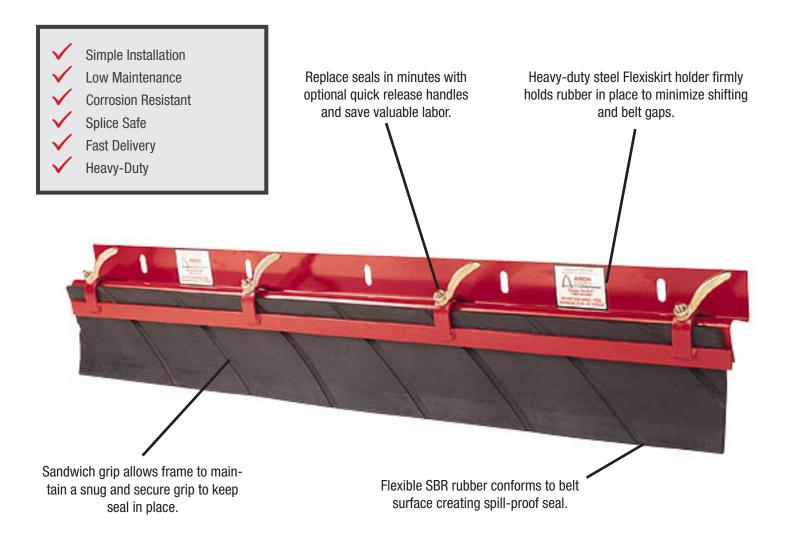

- Flexiskirt Sealing System eliminates spillage by controlling belt sag.
- Reduces belt wear by conforming to the belt's dynamics with minimal friction.
- Flexiskirt seal made to withstand temperatures up to 200 degrees.
- Grooved SBR rubber directs fines back down to the bulk flow preventing it from becoming airborne.
- Optional smooth SBR rubber recommended for reversing belts and positive pressure systems.
- Virtually maintenance free.
- Ideal with Simplicity Slider System.



WHO IS ARCH ENVIRONMENTAL?

Manufacturer and worldwide distributor of preferred bulk conveyor components since 1975.





800.553.4567 www.archenv.com


MECHANICAL DIVISION

Belt Cleaners • Belt Alignment • Sealing Systems Dust Control Systems • Impact/Slider Systems

ELECTRICAL DIVISION

Belt Scales • Metal Detectors • Pull Cord Switches Belt Protection Devices • Conveyor Control Systems

FLEXISKIRT® SEALING SYSTEM

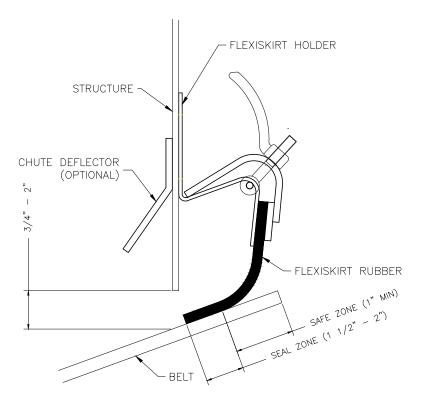

| FLEXISKIRT HOLDER SELECTION TABLE | | | | | |
|-----------------------------------|-------------------------|-------------------------|--|--|--|
| TROUGHING ANGLE | QUICK RELEASE HANDLE | STANDARD NUT RELEASE | | | |
| - 20° | MHF2001-ST | MHF1001-ST | | | |
| 20° | MHF2001-ST | MHF1001-ST | | | |
| 35° | MHF2002-ST | MHF1002-ST | | | |
| 45° | MHF2002-ST | MHF1002-ST | | | |
| + 45° | MHF2002-ST | MHF1002-ST | | | |

FLEXISKIRT HOLDERS SUPPLIED IN 5 FOOT LENGTHS ONLY

| RUBBER AVAILABILITY TABLE | | | | | |
|---------------------------|----------------------|----------------------|---------------|------------------|--|
| RUBBER WIDTH | GROOVED TWO SIDES | GROOVED ONE SIDES | NO GROOVES | MSHA APPROVED | |
| 6" | | / | | / | |
| 8" | | / | / | / | |
| 10" | | / | / | / | |
| 12" | | / | / | X | |

FLEXISKIRT IS MANUFACTURED OF SBR RUBBER
RUBBER IS SUPPLIED IN 25 FOOT AND 50 FOOT ROLLS ONLY
GROOVED RUBBER IS NOT RECOMMENDED FOR REVERSING BELTS

