MINI SABER[®] BELT CLEANER

Simple Installation Low Maintenance Fast Delivery

> Non-segmented polyurethane blade self-sharpens and is safe for mechanical splices.



Mini Twister Tensioner maintains constant blade-to-belt-pressure for optimum cleaning performance.

Optional blades available for your specific needs, including food=grade (FG), high-speed ceramic (C), extra high-temperature (XHT), and high-moisture (GB).



- Patented Mini Twister Tensioner[®] maintains consistent blade-to-belt pressure and its core is GUARANTEED FOR LIFE!
- Designed for head pulleys 22" and smaller.
- Ideal for belts up to 48".
- Single-pin removal makes blade replacement a one-minute process.
- Mini Twister Tensioner® eliminates time and money consuming manual adjustments.
- Curved blade reduces conveyor wear-and-tear by eliminating harmful carryback at the head pulley.



WHO IS ARCH ENVIRONMENTAL?

Manufacturer and worldwide distributor of preferred bulk conveyor components since 1975.





MECHANICAL DIVISION

Belt Cleaners • Belt Alignment • Sealing Systems Dust Control Systems • Impact/Slider Systems


ELECTRICAL DIVISION

Belt Scales • Metal Detectors • Pull Cord Switches Belt Protection Devices

Conveyor Control Systems


800.553.4567 www.archenv.com

MINI SABER® BELT CLEANER

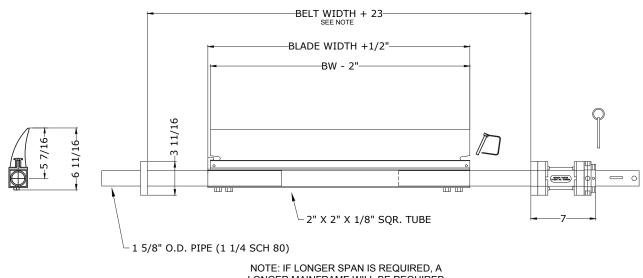

LONGER MAINFRAME WILL BE REQUIRED (CONSULT FACTORY FOR DETAILS)



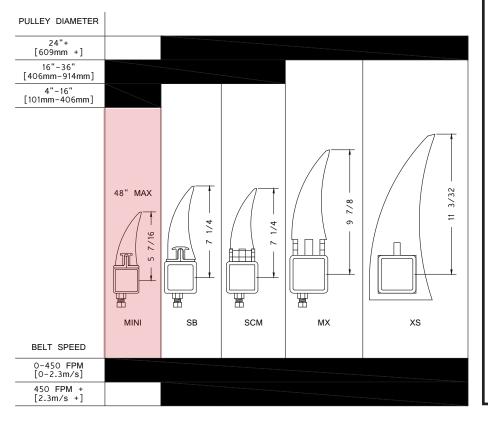

Standard Blades (RED)

Temp Range: 180-220 F

High-Moisture Blades (GRAY) Temp Range: 180-220 F 15%+ Moisture Content

> **Cermic Blades (BLUE)** High Friction/High Speed 750+ ft/min.

High Temperature Blades (GREEN) Temp Range: Up to 300 F

Non-Pigment Blade (NATURAL) Same as Standard Red Blades Ideal for color sensitive materials.

Food Grade (WHITE) FDA approved for mild contact with food products.

Covered under one or more of the following patents:, 4,202,437;4,231,471;4,436,446;4,489,823;4,533,036;4,779,716;4,877,125; 4,989,727;5,149,305;5,222,588;5,222,589;5,219,063;5,350,053;5,725,083 other patents pending



Note: If available, prices vary with options.